


EN 856 4SH MULTI-SPIRAL RUBBER HYDRAULIC HOSE

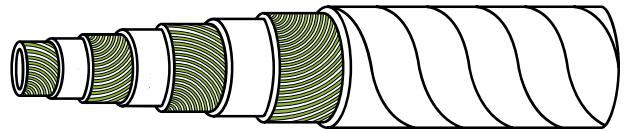

4SH SERIES																	
PROPULSE HOSE PART NO.	HOSE SIZE			HOSE I.D. (MAX)		HOSE O.D. (MAX)		WORKING PRESSURE		PROOF PRESSURE		BURST PRESSURE		BEND RADIUS (MIN)		HOSE WEIGHTS	
	DN	DASH	INCH	MM	INCH	MM	INCH	BAR	PSI	BAR	PSI	BAR	PSI	MM	INCH	KG/M	LBS/ FT
4SH - 12	19	-12	3/4	19.8	0.78	33.0	1.30	420	6090	840	12180	1680	24360	280	11.02	1.44	0.97
4SH - 16	25	-16	1	26.4	1.04	39.9	1.57	380	5510	760	11020	1520	22040	340	13.39	1.99	1.34
4SH - 20	31	-20	1 1/4	33.0	1.30	47.1	1.85	325	4700	650	9400	1296	18800	460	18.11	2.55	1.71
4SH - 24	38	-24	1 1/2	39.3	1.55	55.1	2.17	290	4200	580	8400	1160	16800	560	22.04	3.26	2.19
4SH - 32	51	-32	2	52.0	2.05	69.7	2.74	250	3625	500	7250	1000	14500	700	27.56	4.5	3.02

HOSE CONSTRUCTION:

- › Inner Tube: Oil resistant synthetic rubber
- › Reinforcement: Four high tensile steel spirals
- › Cover: Oil, abrasion and weather resistant synthetic rubber

MAIN APPLICATIONS:

- › High pressure power/drive lines
- › Severe abrasion resistance and good resistance to harsh environmental conditions

TEMPERATURE RANGE:

- › -40°F / +250°F
- › -40°C / +121°C

FULLY MEETS OR EXCEEDS THE FOLLOWING SPECIFICATION(S):

- › EN 856 4SH
- › ISO 3862-1 4SH

NOTE:

- › Not all sizes stocked at all times. Some specifications may vary. Please inquire about availability. ProPulse reserves the right to make any engineering or material changes at any time to our products for enhancement, performance and quality.
- › Available in STANDARD, ROCK and SHIELD cover options.



⚠ WARNING: This product can expose you to chemicals including carbon black, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.