


EN 856 4SP MULTI-SPIRAL RUBBER HYDRAULIC HOSE

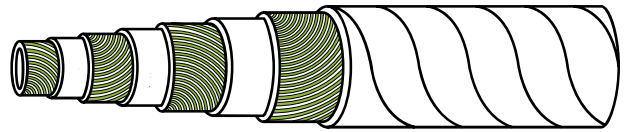

4SP SERIES																	
PROPULSE HOSE PART NO.	HOSE SIZE			HOSE I.D. (MAX)		HOSE O.D. (MAX)		WORKING PRESSURE		PROOF PRESSURE		BURST PRESSURE		BEND RADIUS (MIN)		HOSE WEIGHTS	
	DN	DASH	INCH	MM	INCH	MM	INCH	BAR	PSI	BAR	PSI	BAR	PSI	MM	INCH	KG/M	LBS/ FT
4SP - 06	10	-6	3/8	10.1	0.40	22.2	0.87	445	6450	890	12900	1780	25806	180	7.09	0.7	0.47
4SP - 08	12	-8	1/2	13.5	0.53	25.4	1.00	415	6020	830	12035	1660	24070	230	9.06	0.84	0.56
4SP - 10	16	-10	5/8	16.7	0.66	29.0	1.14	350	5075	700	10150	1400	20300	250	9.84	1.13	0.76
4SP - 12	19	-12	3/4	19.8	0.78	33.0	1.30	350	5075	700	10150	1400	20300	300	11.81	1.41	0.95
4SP - 16	25	-16	1	26.4	1.04	40.9	1.61	280	4060	560	8120	1120	16240	340	13.39	1.85	1.24
4SP - 20	31	-20	1 1/4	33.0	1.30	52.4	2.06	210	3045	420	6090	840	12180	460	18.11	3.2	2.15

HOSE CONSTRUCTION:

- › Inner Tube: Oil resistant synthetic rubber
- › Reinforcement: Four high tensile steel spirals
- › Cover: Oil, abrasion and weather resistant synthetic rubber

MAIN APPLICATIONS:

- › High pressure power/drive lines
- › Severe abrasion resistance and good resistance to harsh environmental conditions

TEMPERATURE RANGE:

- › -40°F / +250°F
- › -40°C / +121°C

FULLY MEETS OR EXCEEDS THE FOLLOWING SPECIFICATION(S):

- › EN 856 4SP
- › ISO 3862-1 4SP

NOTE:

- › Not all sizes stocked at all times. Some specifications may vary. Please inquire about availability. ProPulse reserves the right to make any engineering or material changes at any time to our products for enhancement, performance and quality.
- › Available in STANDARD, ROCK and SHIELD cover options.



⚠ WARNING: This product can expose you to chemicals including carbon black, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.