


EN 857 2SC COMPACT RUBBER HYDRAULIC HOSE

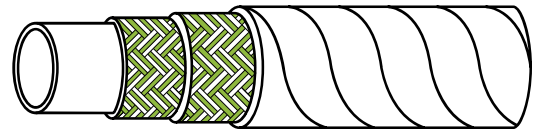

2SC SERIES																	
PROPULSE HOSE PART NO.	HOSE SIZE			HOSE I.D. (MAX)		HOSE O.D. (MAX)		WORKING PRESSURE		PROOF PRESSURE		BURST PRESSURE		BEND RADIUS (MIN)		HOSE WEIGHTS	
	DN	DASH	INCH	MM	INCH	MM	INCH	BAR	PSI	BAR	PSI	BAR	PSI	MM	INCH	KG/M	LBS/ FT
2SC - 04	6	-4	1/4	6.9	0.27	14.2	0.56	400	5800	800	11600	1600	23200	75	2.95	0.25	0.17
2SC - 05	8	-5	5/16	8.5	0.33	16.0	0.63	350	5075	700	10150	1400	20300	85	3.35	0.32	0.22
2SC - 06	10	-6	3/8	10.1	0.40	18.3	0.72	330	4785	660	9570	1320	19140	90	3.54	0.35	0.24
2SC - 08	12	-8	1/2	13.5	0.53	21.5	0.85	275	3988	550	7975	1100	15950	130	5.12	0.44	0.3
2SC - 10	16	-10	5/8	16.7	0.66	24.7	0.97	250	3625	500	7250	1000	14500	170	6.69	0.61	0.41
2SC - 12	19	-12	3/4	19.8	0.78	28.6	1.13	215	3118	430	6235	860	12470	200	7.87	0.77	0.52
2SC - 16	25	-16	1	26.4	1.04	36.6	1.44	165	2393	330	4786	660	9572	250	9.84	1.15	0.77

HOSE CONSTRUCTION:

- › Inner Tube: Oil resistant synthetic rubber
- › Reinforcement: Two layers of high tensile steel braid
- › Cover: Oil, abrasion and weather resistant synthetic rubber

MAIN APPLICATIONS:

- › Medium to high pressure lines that require tight bend radius

TEMPERATURE RANGE:

- › -40°F / +212°F
- › -40°C / +100°C

INTERMITTENT SERVICE:

- › -40°F / +257°F
- › -40°C / +125°C

FULLY MEETS OR EXCEEDS THE FOLLOWING SPECIFICATION(S):

- › EN 857 2SC
- › ISO 11237-1 2SC
- › SAE 100R16*

NOTE:

- › Not all sizes stocked at all times. Some specifications may vary. Please inquire about availability. ProPulse reserves the right to make any engineering or material changes at any time to our products for enhancement, performance and quality.
- › Available in STANDARD, ROCK and SHIELD cover options.

* Hose is dual branded — meets or exceeds SAE 100R16 requirements



⚠ WARNING: This product can expose you to chemicals including carbon black, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.