


SAE 100R12 / EN 856 R12 MULTI-SPIRAL RUBBER HYDRAULIC HOSE

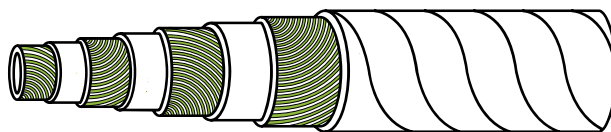

1200 SERIES																	
	HOSE SIZE			HOSE I.D. (MAX)		HOSE O.D. (MAX)		WORKING PRESSURE		PROOF PRESSURE		BURST PRESSURE		BEND RADIUS (MIN)		HOSE WEIGHTS	
PROPULSE HOSE PART NO.	DN	DASH	INCH	MM	INCH	MM	INCH	BAR	PSI	BAR	PSI	BAR	PSI	MM	INCH	KG/M	LBS/FT
1200 - 06	10	-6	3/8	10.1	0.40	21	0.83	280	4060	560	8120	1120	16240	125	4.92	0.67	0.45
1200 - 08	12	-8	1/2	13.5	0.53	24.6	0.97	280	4060	560	8120	1120	16240	180	7.09	0.84	0.56
1200 - 10	16	-10	5/8	16.7	0.66	28.2	1.11	280	4060	560	8120	1120	16240	200	7.87	1.13	0.76
1200 - 12	19	-12	3/4	19.8	0.78	31.5	1.24	280	4060	560	8120	1120	16240	240	9.45	1.33	0.89
1200 - 16	25	-16	1	26.4	1.04	39.2	1.54	280	4060	560	8120	1120	16240	300	11.81	1.79	1.2
1200 - 20	31	-20	1 1/4	33.0	1.30	48.6	1.91	210	3045	420	6090	840	12180	420	16.54	2.59	1.74

HOSE CONSTRUCTION:

- › Inner Tube: Oil resistant synthetic rubber
- › Reinforcement: Four high tensile steel spirals
- › Cover: Abrasion and weather resistant synthetic rubber

MAIN APPLICATIONS:

- › Medium to high pressure hydraulic applications

TEMPERATURE RANGE:

- › -40°F / +250°F
- › -40°C / +121°C

FULLY MEETS OR EXCEEDS THE FOLLOWING SPECIFICATION(S):

- › SAE 100R12
- › EN 856 R12
- › ISO 3862-1 R12

NOTE:

- › Not all sizes stocked at all times. Some specifications may vary. Please inquire about availability. ProPulse reserves the right to make any engineering or material changes at any time to our products for enhancement, performance and quality.
- › Available in STANDARD, ROCK and SHIELD cover options.



⚠ WARNING: This product can expose you to chemicals including carbon black, which is known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.